


1.1.5 Connection cables for uniaxial acceleration sensors

Low noise coax cable

with Microdot male connector 10-32 and Lemo coax male connector 00

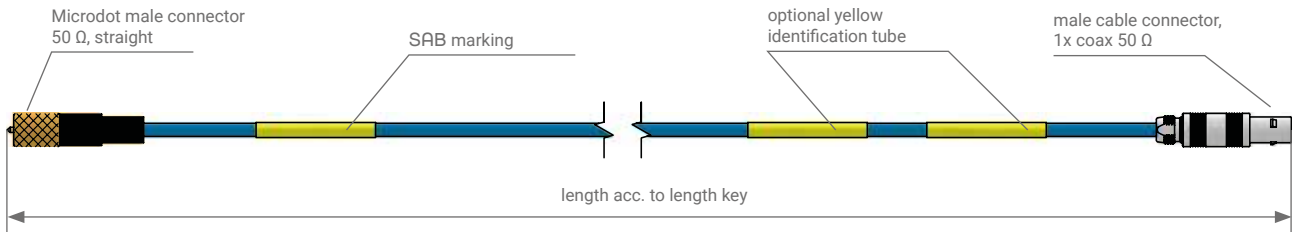

TPFK

Application range

Sensor cable for uniaxial acceleration sensor (IEPE) and connection at e.g. Siemens LMS SCADAS measuring technique



PUR

Connector

side 1: Microdot male connector 10-32 UNF
side 2: Lemo coax male connector A coded



Silicone

Cable data

	TPFK	PUR	Silicone
construction:	1 x 0,20 mm Ø	1 x 0,20 mm Ø	1 x 0,20 mm Ø
insulation:	TPFK	TPFK	TPFK
outer sheath:	TPFK	PUR	Silicone
sheath colour:	blue	black	turquoise
outer diameter:	approx. 1,7 mm	approx. 2,1 mm	approx. 2,1 mm
operating voltage:	max. 375 V	max. 350 V	max. 350 V
temperature range:	-55°C / +250°C	-40°C / +90°C (+125°C 2500h)	-25°C / +180°C
special characteristics:	resistant to high temperatures ✓	mechanically more robust ✓	highest flexibility ✓

Configuration examples

item no.	sheath material	length „L“ [mm]
S3011-3242-00100	TPFK	1000
S3012-3242-00100	PUR	1000
S3013-3242-00100	Silicone	1000

Further service aspects



Individual marking by shrinkable sleeve as for example material number or barcode

SAB identification:
item number, batch number