


# CABLE OVERMOULDING



## USB 3.0 CABLE

with USB A and USB B connector, overmoulded (angle downwards)

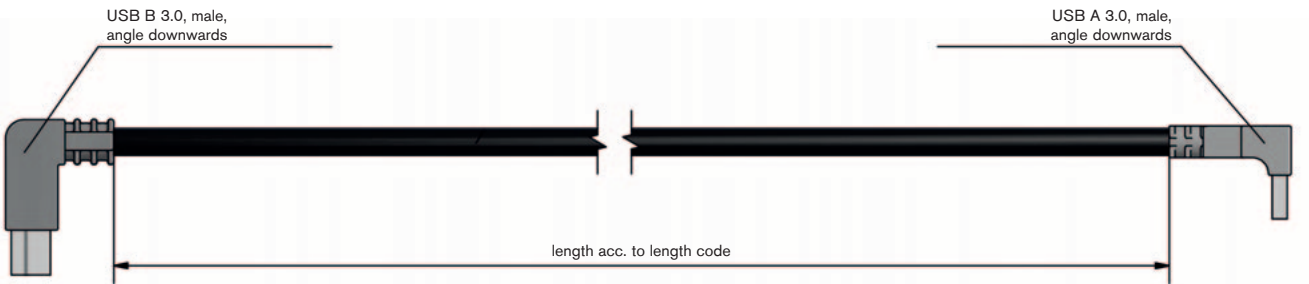

### Technical Data:

Temperature range:	-30 °C to +80 °C
Voltage range:	0 – 5 V
Connection side 1:	USB-B connector, tilted
Connection side 2:	USB-A connector, tilted

### Cable characteristics:

SAB item no.:	L0604-9004
Dimension:	3x(2x30 AWG)ST + 2 x 24 AWG
Conductor:	silver-plated or tinned copper strands, fine wires
Insulation:	SABIX®
Screen:	alu foil with drain wire as well as tinned copper braiding
Outer sheath:	PUR, black (similar RAL 9005)
Outer diameter:	approx. 6,4 mm

item no. with length code	
length	item no.: S3600-4103-_____
0,24 m	00024
0,5 m	00050
1,0 m	00100
2,0 m	00200
3,0 m	00300
5,0 m	00500
7,5 m	00750
10,0 m	01000
15,0 m	01500
20,0 m	02000
25,0 m	02500

