


HELIX CABLE

with axial outlets, BNC connector and smoothly cut end

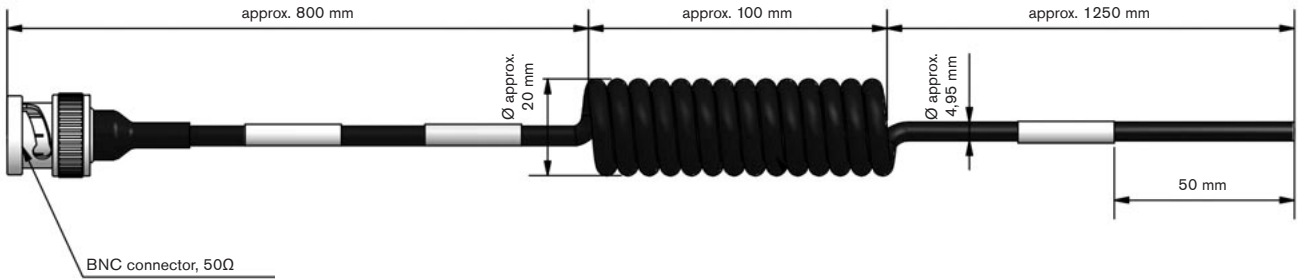

Technical Data:

Temperature range:	-40 °C to +90 °C (cable)
Voltage range:	max. 500 V (cable)
Connection side 1:	HF plug connector
Connection side 2:	cut smoothly

Cable characteristics:

SAB item no.:	L3600-9064 / KOAX 50 Ω
Dimension:	AWG 22/19
Conductor:	bare copper strands, fine wires
Insulation:	SABIX®
Screen:	wrapped with tinned copper braiding
Outer sheath:	PUR, black (similar RAL 9005)
Outer diameter:	approx. 5,0 mm

item no. with length code	
length	item no.: S3600-4103- _ _ _ _
0,5 m	00050
1,0 m	00100
2,0 m	00200
3,0 m	00300
5,0 m	00500
7,5 m	00750
10,0 m	01000
15,0 m	01500
20,0 m	02000
25,0 m	02500

Among others the following cable types belong to our delivery program:

- ✓ low-noise cable
- ✓ RG 316
- ✓ RG 58
- ✓ RG 179
- ✓ coax cables with 50 Ω or 75 Ω
- ✓ cables with heat resistant, flexible outer sheath up to +150°C

Please choose from the following plug connectors:

- UHF plug connector
- mini UHF plug connector
- MMCX plug connector
- SMB plug connector
- ...